

MONO-PHASE WASHING MACHINES



Range for automatic parts washers mono-phase with hot water for large mechanical parts
Made of stainless steel, with revolving basket and frontal charging, max temperature of bath 75°C



Standard version



With watertight door closed




Basket carriage

OPTIONALS

- Electric drying (12kW)
- Oil skimmer (24V)
- Weekly programming unit
- External insulation
- Fresh water rinse
- Cold air blowing
- Load weight 1500 kg (with automatic translation basket)
- Steam condenser

NOTES

- Available with electric heating, with gas burner or with diesel burner
- Optionals included: automatic tank refilling, carriage for basket, hour meter, automatic low water level shut-off, water circuit and basket in stainless steel, motorized basket, vapor extraction
- Structure of stainless steel
- Supplied as assembled unit
- Technical data and dimensions are not binding and can be changed without notice

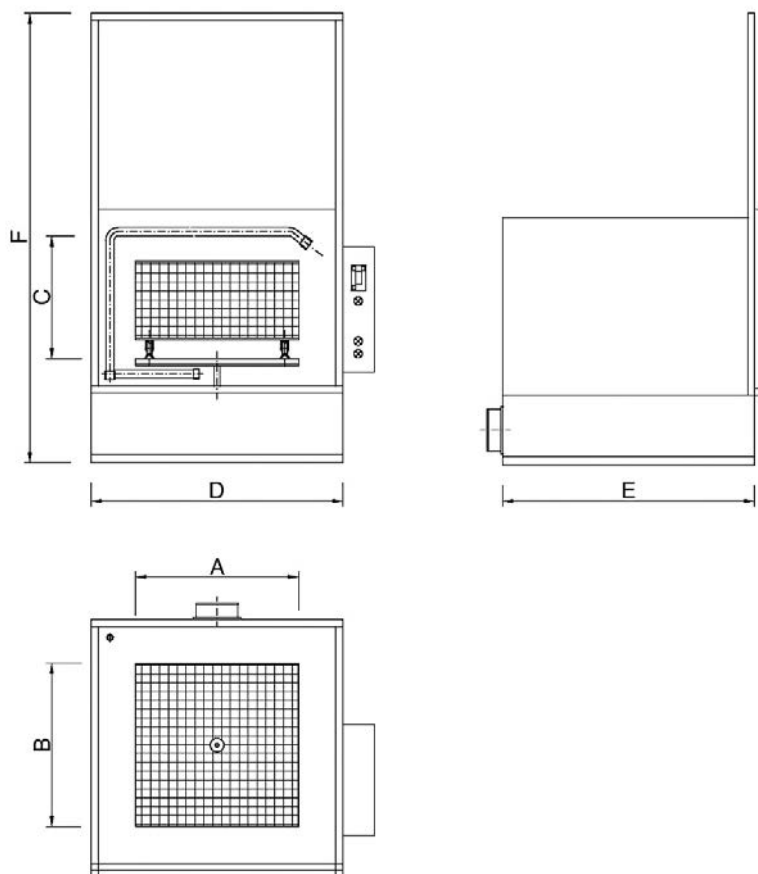

DESCRIPTION OF EQUIPMENT

Model	Useful basket dimensions			Outer dimensions		
	A	B	C	D	E	F
Euro LSMCF1	1.100	1.100	800	1.975	1.600	2.145
Euro LSMCF2	1.300	1.300	900	2.185	1.800	2.245
Euro LSMCF3	1.500	1.500	1.000	2.385	2.000	3.330

TECHNICAL DATA

Model	Max. basket load	Tank capacity	Electric power pump	Flow ratio pump	Pump pressure	Thermal power	Temperature adjustment	Time adjustment	Air flow vapor extractor	Electric power vapor extractor	Total electric power	Weight
	kg	liters	kW	l/min	bar	kW	°C	min	m ³ /h	kW	kW	kg
Euro LSMCF1	700	320	5,5	500	4,3	20	0 ÷ 75°	0 ÷ 120'	650	0,55	25,55	600
Euro LSMCF2	700	420	5,5	500	4,3	30	0 ÷ 75°	0 ÷ 120'	650	0,55	35,55	700
Euro LSMCF3	700	550	7,5	550	4,7	30	0 ÷ 75°	0 ÷ 120'	650	0,55	37,55	800