


## WASHING MACHINE TUNNEL



“Three-phase range – Methane and/or GPL burner –  
Maximum temperature of the degreasing bath 60 °C”

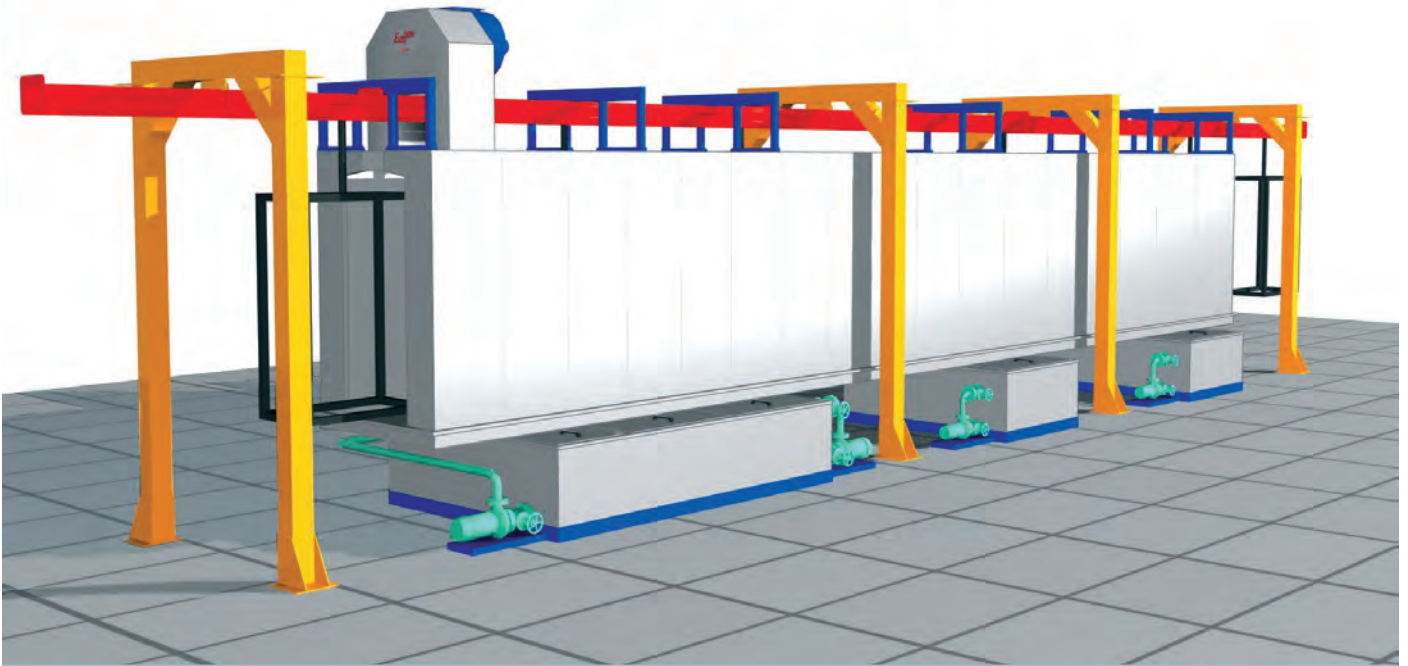


### OPTIONAL ACCESSORIES

- Adaptation at different conveyor speeds
- Change of the washing cycle phases
- Change of the shape as needed
- Oil burner
- Electric control board

### NOTES

Technical characteristics and dimensions are given as indication and can be changed for their improvement  
Carried out in stainless steel, external reinforcements made of painted steel  
Insulation hot tub with mineral wool thickness 50 and density 100 kg/m<sup>3</sup>  
Pre-assembled supply

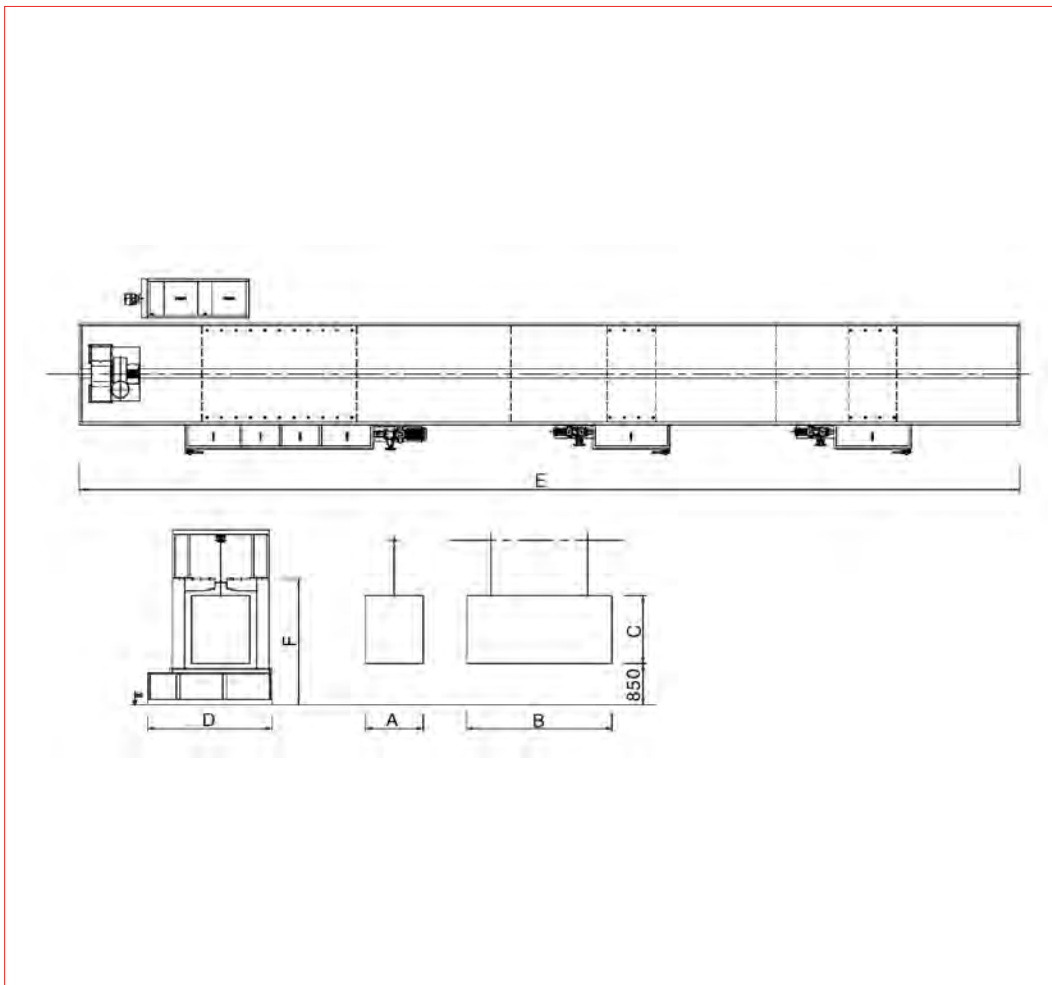

## EQUIPMENT IDENTIFICATION

Model	Useful dimensions (mm)			Overall dimensions (mm)		
	A	B	C	D	E	F
Euro TLL1	500	1.000	1.000	1.900	13.500	2.200
Euro TLL2	600	1.000	1.500	2.000	13.500	2.700
Euro TLL3	800	1.000	1.800	2.200	13.500	3.000
Euro TLL4	800	1.000	2.000	2.200	13.500	3.200
Euro TLL5	800	1.000	2.200	2.200	13.500	3.400

## TECHNICAL CHARACTERISTICS

## CYCLE PHASES

Model	Conveyor velocity	Total electrical power	Total thermal duty	Burners	Exhaust chimney	Degreasing	Rinsing	Rinsing
						Temperature bath 60°C	Temperature bath °C ambient	Temperature bath °C ambient
						min.	min.	min.
Euro TLL1	1	13,5	120.000	1	2	3	1	1
Euro TLL2	1	15,5	170.000	1	2	3	1	1
Euro TLL3	1	19,5	200.000	1	2	3	1	1
Euro TLL4	1	20	200.000	1	2	3	1	1
Euro TLL5	1	21	220.000	1	2	3	1	1