

## STATIC OVENS WITH INDIRECT HEAT EXCHANGE



Series with indirect heat exchange air/fumes in combustion chamber  
Methane gas or LPG burner - Max. working temperature 250°C




Standard oven



For large pieces



With manual hanging conveyor




Combustion chamber

### OPTIONAL ACCESSORIES

- Fumes extraction ducts made of stainless steel
- Fumes extraction ducts
- Extraction fan
- Additional door
- CE complying control panel
- Inverter
- Graphic temperature recorder
- Inspection windows + internal lighting
- Internal chamber of stainless steel
- Painted door
- Painted external walls

### NOTES

- Construction of galvanized metal sheet
- Insulation in mineral wool, thickness 150 mm, density 100 kg/m<sup>3</sup>
- Supplied as assembly kit
- Technical data and dimensions are given as indication and can be changed according to specific customer's requirements

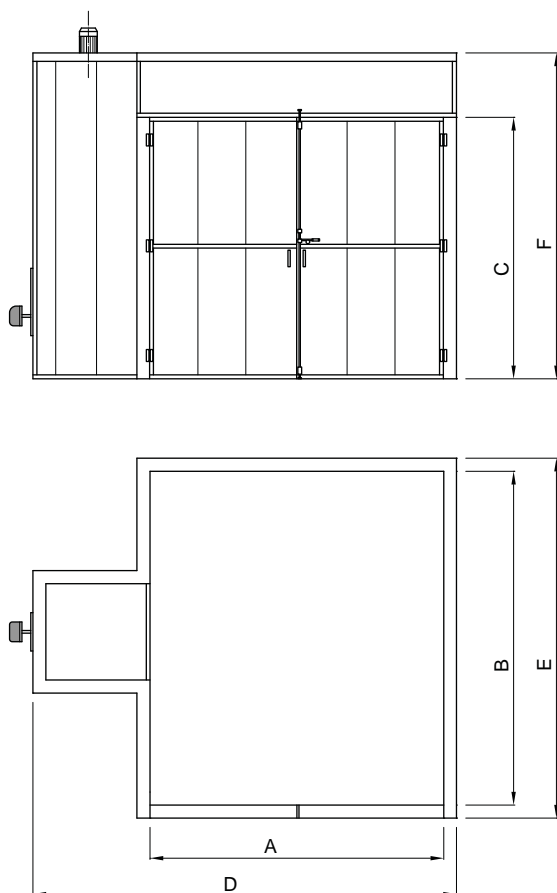

### DESCRIPTION OF EQUIPMENT

Model	Inside dimensions			Outside dimensions		
	A	B	C	D	E	F
Euro FSC 1	2.000	3.000	2.200	3.100	3.300	2.500
Euro FSC 2	2.000	4.000	2.200	3.100	4.300	2.500
Euro FSC 3	2.000	6.000	2.200	3.100	6.300	2.500
Euro FSC 4	3.000	6.000	2.200	4.100	6.300	2.500
Euro FSC 5	3.000	6.500	3.200	4.100	6.800	3.500
Euro FSC 6	3.000	8.000	3.200	4.100	8.300	3.500

### TECHNICAL DATA

Model	Air flow rate	Extraction fans	Electric power	Heat power	Burners	Access doors
	m <sup>3</sup> /h	nb.	kW	kCal/h	nb.	nb.
Euro FSC 1	3.500	1	1,1	70.000	1	1
Euro FSC 2	4.000	1	1,5	90.000	1	1
Euro FSC 3	6.800	1	2,2	120.000	1	1
Euro FSC 4	8.000	1	2,2	140.000	1	1
Euro FSC 5	13.000	1	4	250.000	1	1
Euro FSC 6	15.000	1	5,5	300.000	1	1