


MANUAL WASHING BOOTHS WITH WATER POLISHING MACHINE



“ Range with vertical air flow”

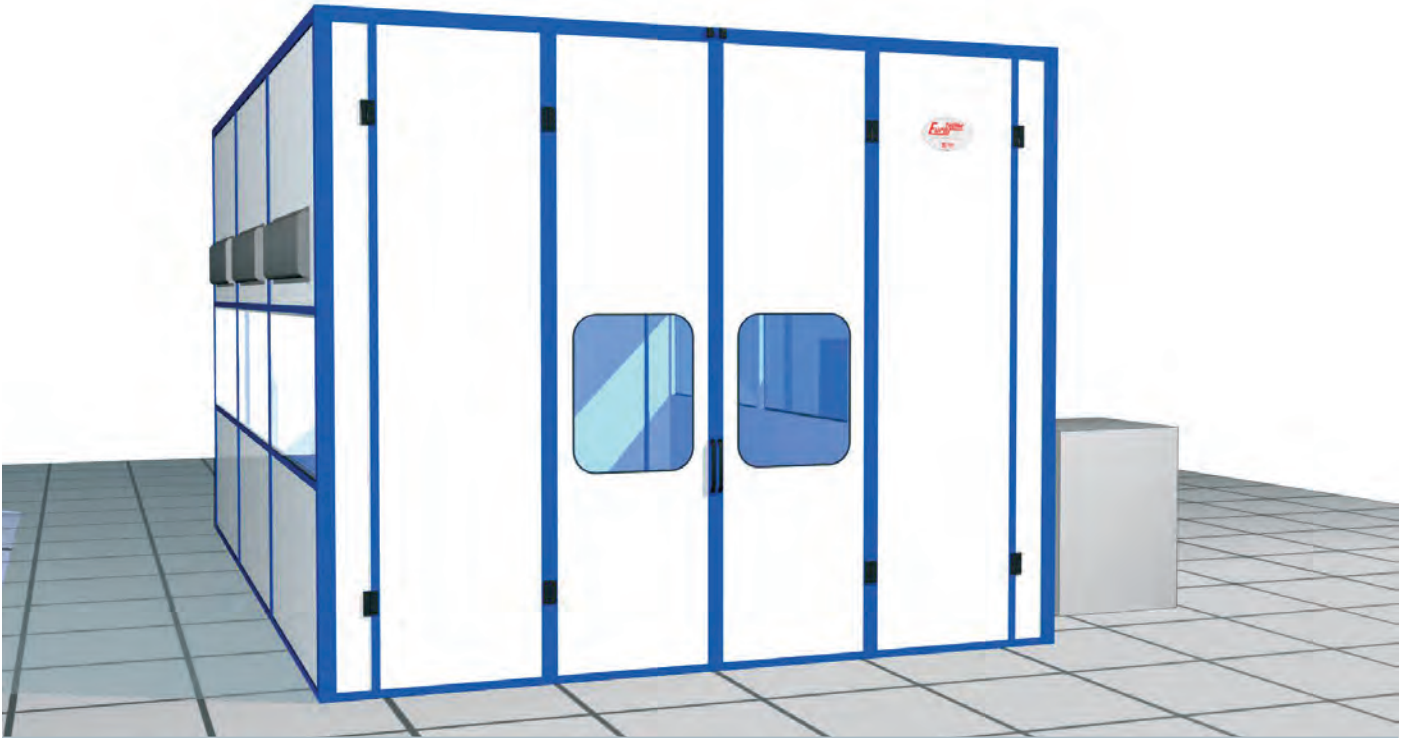


OPTIONAL ACCESSORIES

- Side walls and roof extension with a multiple length of 500 mm
- Waterproof neon light, IP 65, 2 neon of 36 W, length 1200 mm
- Raised metallic base, h = 300 mm with access ramp
- Water polishing machine
- Water storage tank complete with filter to the water polishing machine attack
- Electric control board

NOTES

- Technical characteristics and dimensions are given as indication and can be changed for their improvement
- Carried out in galvanized metal sheet, in pre-painted galvanized metal sheet
- Civil engineering: 2 canals wideness: 600 mm and depth 700 mm with a linking tunnels to the sucking unit
- Useful dimensions main gate mm: 4000 x 4000 h
- Pedestrian door dimensions mm: 1000 x 2100 h
- Vapour filtration through filter stop drops
- Spare parts supplied in kit

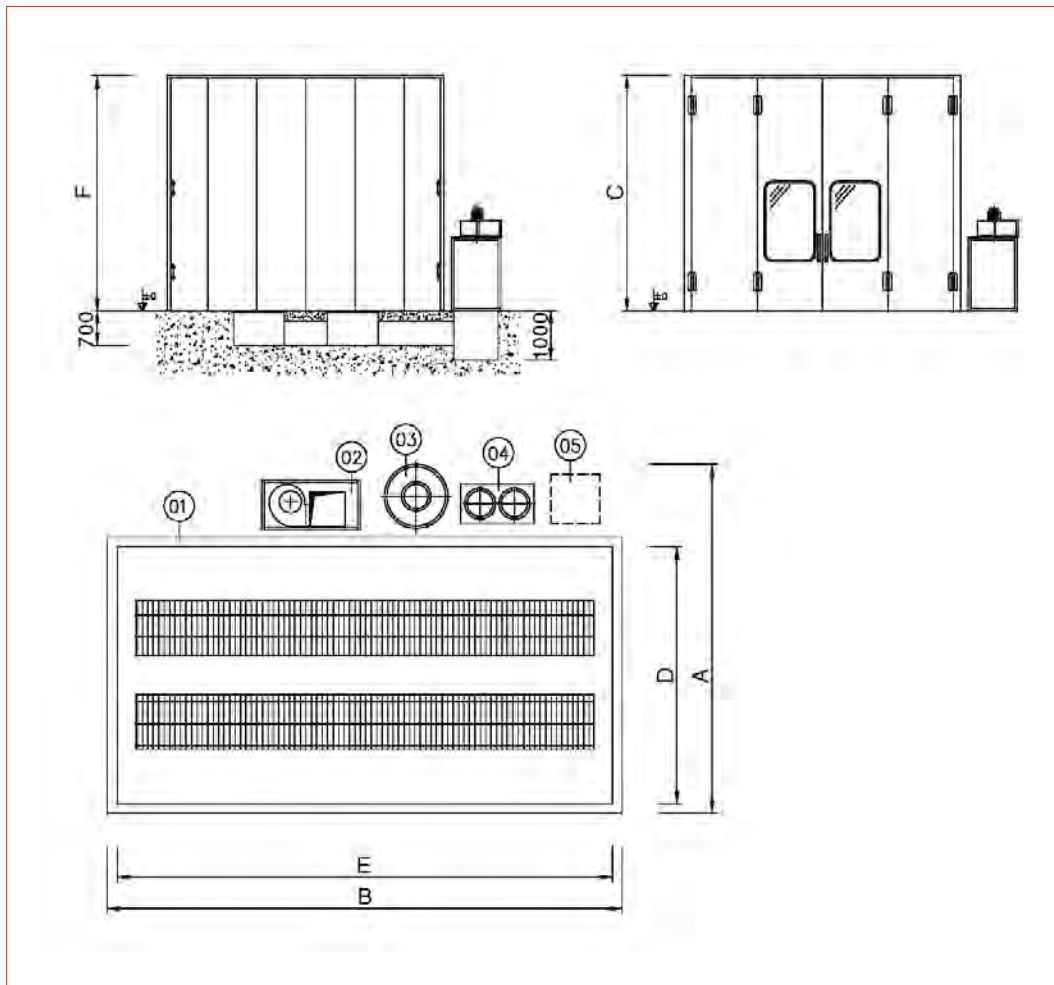

- 01 Body booth
- 02 Air suction unit
- 03 Water storage tank
- 04 Water filtration unit
- 05 Water polishing machine

EQUIPMENT IDENTIFICATION

Model	Overall dimensions (mm)			Useful dimensions (mm)		
	A	B	C	D	E	F
Euro LV1	6.200	4.200	4.100	4.000	4.000	4.000
Euro LV2	6.200	6.200	4.100	4.000	6.000	4.000
Euro LV3	7.200	6.200	4.100	5.000	6.000	4.000
Euro LV4	7.200	8.200	4.100	5.000	8.000	4.000
Euro LV5	7.200	10.200	4.100	5.000	10.000	4.000
Euro LV6	7.200	12.200	4.100	5.000	12.000	4.000

TECHNICAL CHARACTERISTICS

Model	Air capacity	Extraction fans	Electrical power
	m ³ /h	n°	kW
Euro LV1	9.600	1	3
Euro LV2	13.500	1	4
Euro LV3	17.000	1	5,5
Euro LV4	22.500	2	3
Euro LV5	28.000	1	7,5
Euro LV6	34.000	1	9,2